


Revisions		
Rev.	Date	Comments

1. Drawings copyright of © Architectural Vistadesigns Ltd.
2. Drawings not to be used without written consent.
3. Planning drawings should not be used for the purpose of construction or working drawings.
4. Building Regulation approved drawings are not construction or working drawings.
5. All dimensions must be checked and verified on site before commencing works.
6. OS data may have been used for the purpose of a Planning submission.
7. Do not scale from the drawings.

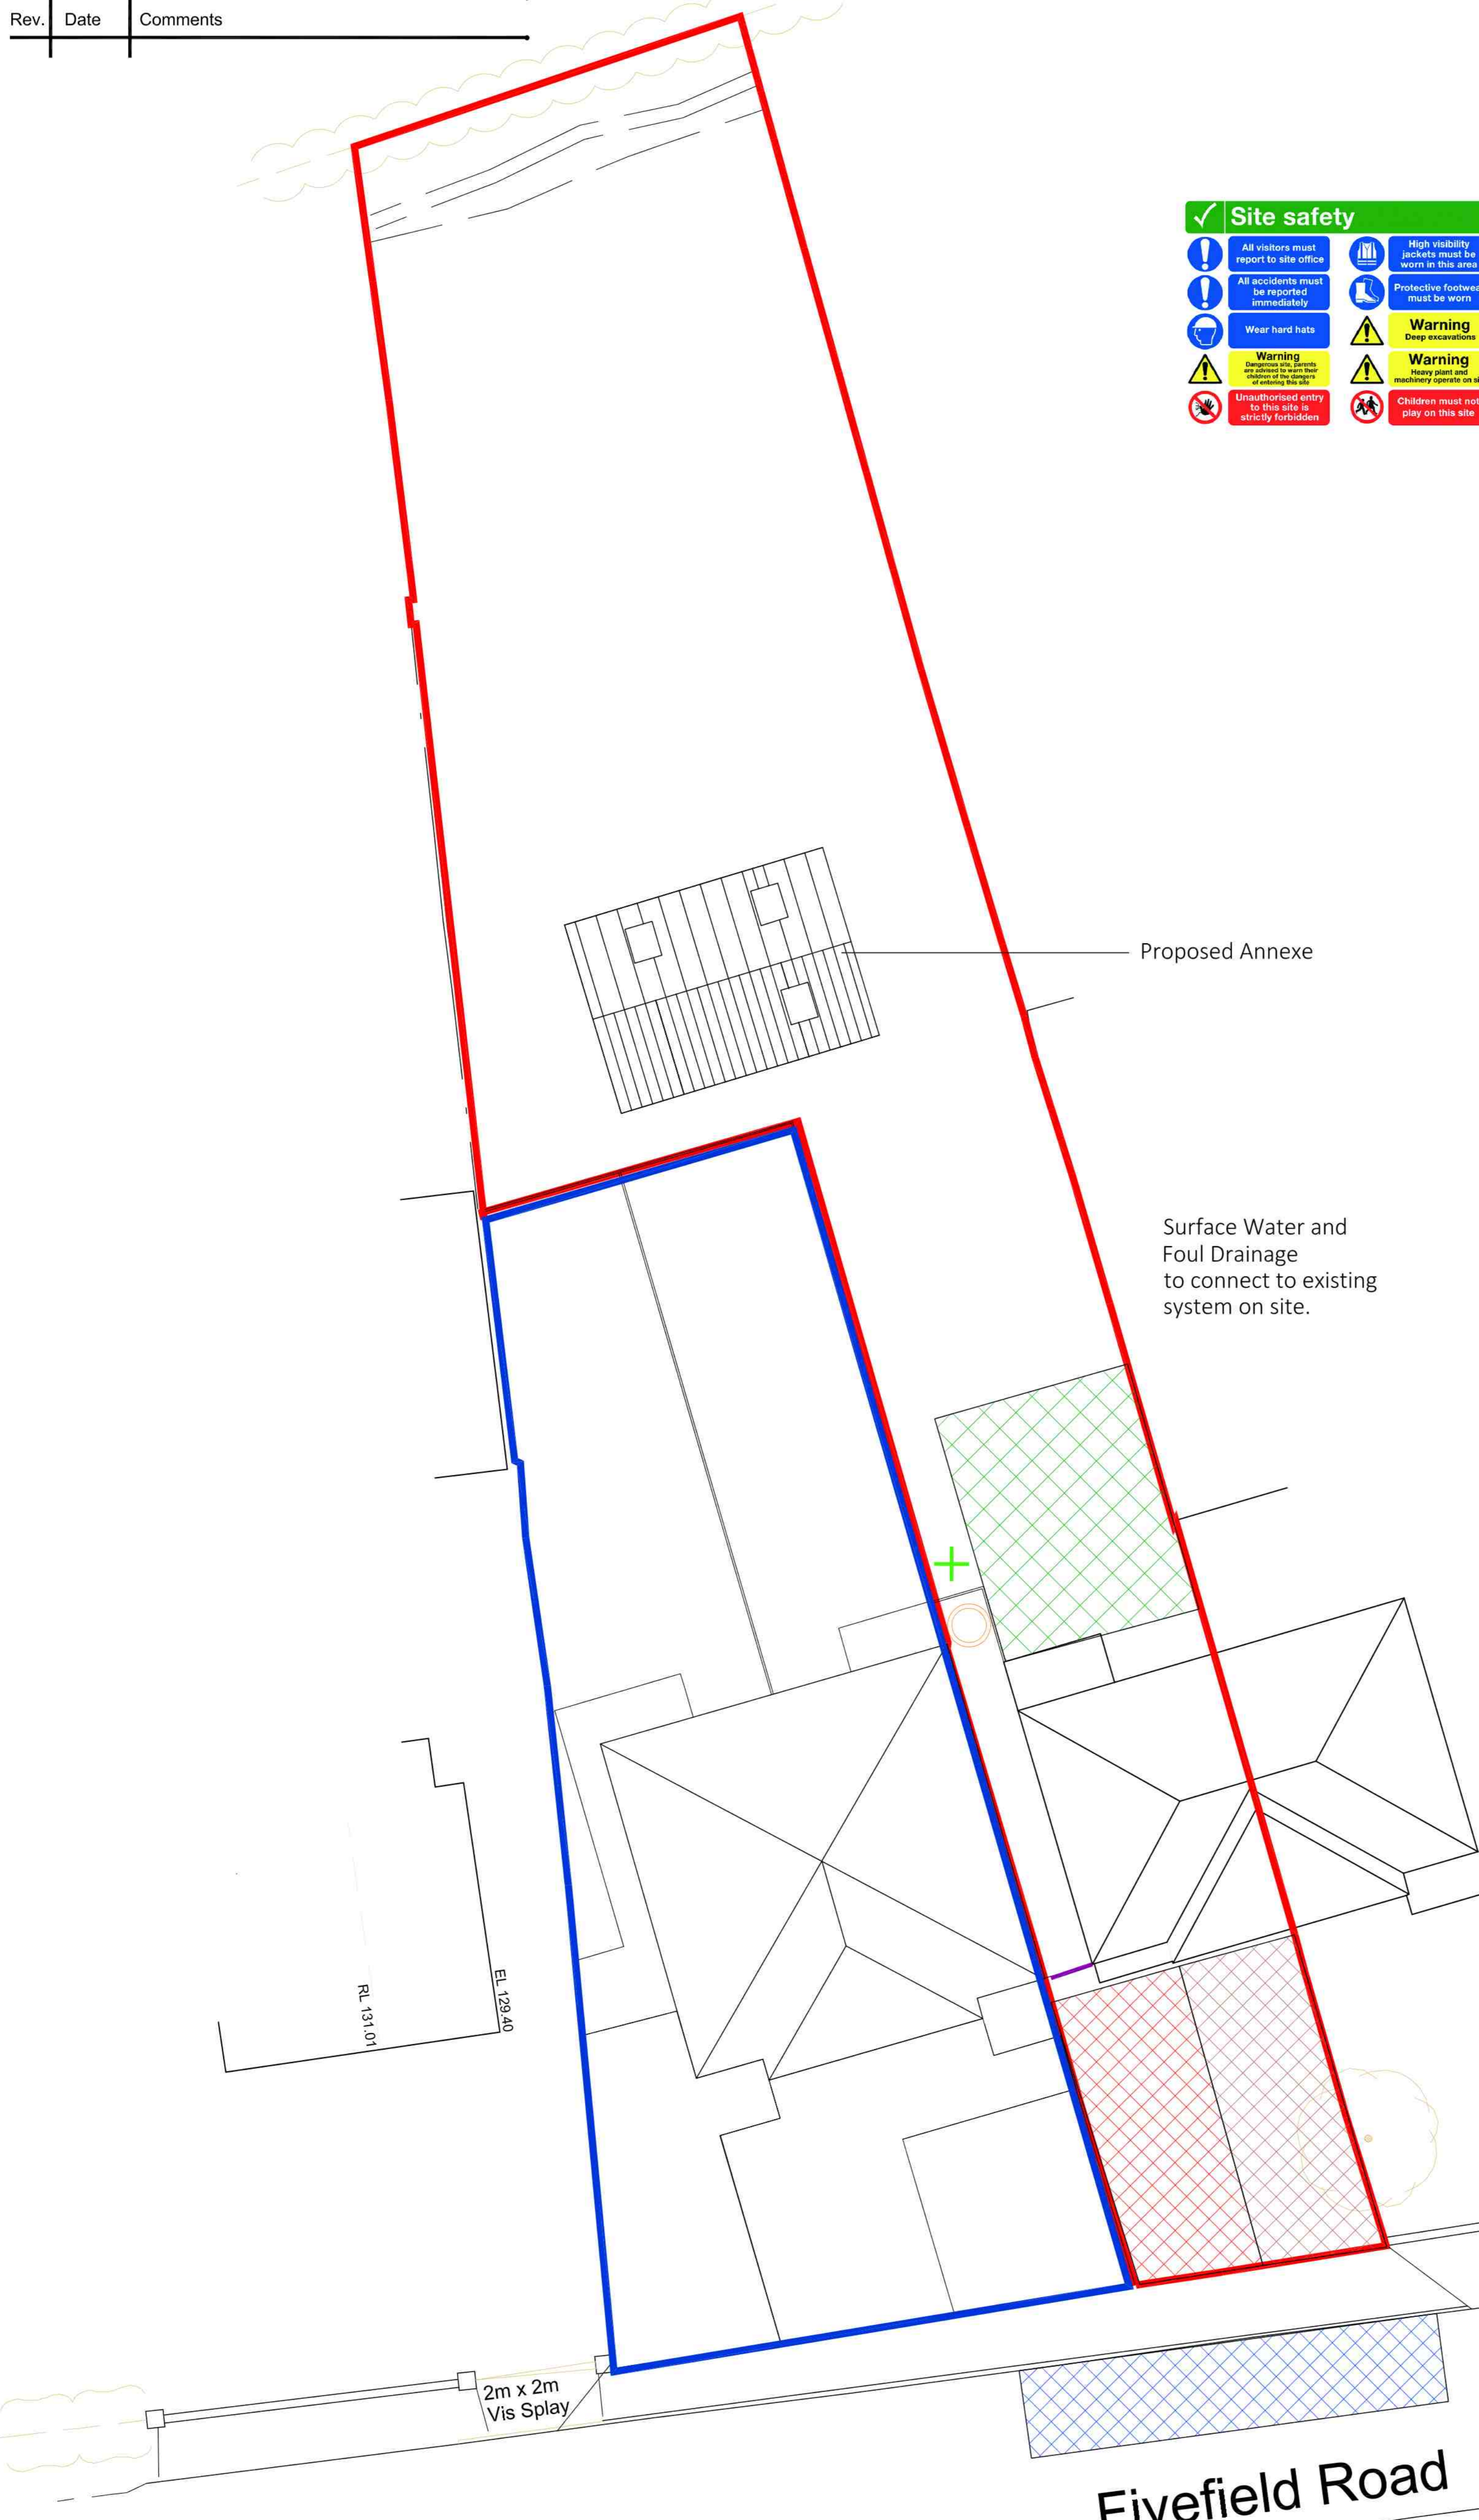

Site safety

- All visitors must report to site office
- All accidents must be reported immediately
- Wear hard hats
- Warning: Deep excavations
- Warning: Heavy plant and machinery operate on site
- Unauthorized entry to this site is strictly forbidden
- High visibility jackets must be worn in this area
- Protective footwear must be worn
- Warning: Children must not play on this site

Proposed Method Statement Legend:

Working hours between 8am 5pm Monday to Friday

Site Security hoarding and 500 x 500mm Site Safety Board (See image to the left). All boundaries to be checked on site and Site security Hoarding to be erected where there are any gaps.

- Storage of Plant and Materials
- Temporary loading and Un-loading area
- Parking for on-site Operartives and Visitors
- Welfare Facilites area
- Temporary Wooden Shed with Dry Change area and Fresh Water provided. Natural Ventilation provided to Facility. Portaloo cabin provided with Washing facilities.
- First Aid Equipment
- Designated area for Recycling and disposing of construction waste
- Signing in point - Box mounted on Fence.

Any construction vehicle that enters on the site i.e Diggers etc before leaving site, the Wheels will be hosed down to avoid and mud and deposit of materials being left on the Public Highway.

Temporary Water Bowser to be provided on site during the dry summer months to control and Dust suppression on roads.

- THERE SHALL BE NO BURNING/FIRES ON SITE. WASTE MUST BE DISPOSED OF IN A RESPONSIBLE MANNER AND RECYCLED WHENEVER POSSIBLE.
- WORKING AREAS SHOULD BE SCREENED WHEREVER POSSIBLE.
- WORKING AREAS WILL BE DAMPED DOWN AS REQUIRED. FOR THIS THE CONTRACTOR SHALL ARRANGE AND MAINTAIN AN ADEQUATE WATER SUPPLY AND HAVE SUITABLE FACILITIES FOR ITS APPLICATION. THIS MAY BE BY WATER BOWSER OR FINE SPRAY.
- PROVISION SHALL BE MADE TO PREVENT ENTRAINMENT OF MUD TO THE PUBLIC HIGHWAY AND FOR CLEANING HIGHWAYS OR ON SITE ROADWAYS WITH A ROAD SWEEPER.
- DUSTY MATERIALS STOCKPILES AND DUSTY ACTIVITIES WILL BE EFFECTIVELY SCREENED AND ALSO DAMPED DOWN IF NECESSARY.
- VEHICLES CARRYING WASTE MATERIALS OFF-SITE WILL BE SHEETED IF THERE IS ANY RISK OF DUST BEING RELEASED FROM THE LOAD DURING TRANSPORT



- Site Boundary
- Other land in clients ownership



ArchitecturalVistadesigns Ltd
 a: The Paddock, 118 Paddock Way, Hinckley, Leics LE10 0BZ
 m: 0785 458 2584 t: 01455 698 839
 w: www.architecturalvistadesigns.co.uk
 e: studio@architecturalvistadesigns.co.uk

Client: Joseph Greenhall Dwg Status: PLANNING
 Dwg: Proposed Method Statement
 Project: Proposed Annexe at No. 58, Fivefield Road, Kersley CV7 8JE
 Scale: 1:100 @ A1
 Date: 01.05.2019 Drawn By: map
 Dwg No. | Rev.
 AVD-412-FRK-PL03 | A